ROUGH TERRAIN TELESCOPIC BOOMS

HT23 RTJ O
HT23 RTJ PRO

Outstanding performance

- 22.5 m working height
- 18.3 m maximum outreach

Optimal productivity

- Best lifting speed 56 sec
- Fully proportional and simultaneous movements

Best comfort and safety feeling

- Rigid boom
- Single control for both steering axles

Optimized maintenance time

- Easy access to all components
- Easy boom maintenance
- Exclusive modular basket, quick and easy to repair
- Haulotte Activ'Shield™ Bar - PRO Model

Haulotte GROUP
More than lifting

www.haulotte.com

HT23 RTJ O / RTJ PRO

ROUGH TERRAIN TELESCOPIC BOOMS

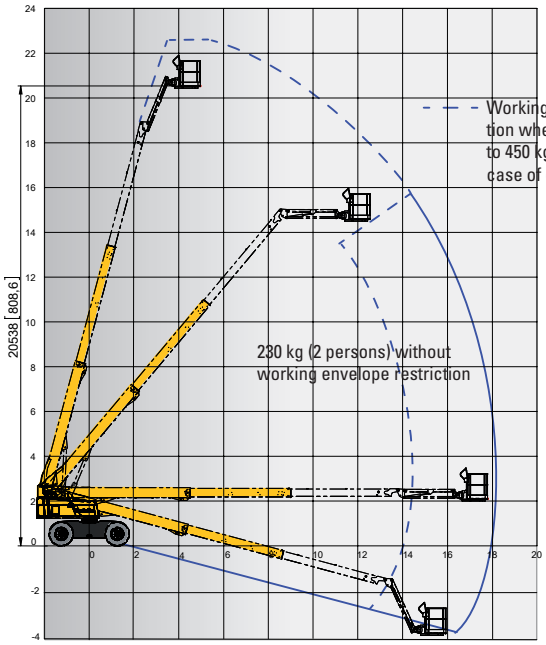

TECHNICAL DATA	HT23 RTJ O	HT23 RTJ PRO
Working height	22.5 m	22.5 m
Platform height	20.5 m	20.5 m
Horizontal outreach	18.3 m	18.3 m
Lift capacity	230 kg (2 persons)	230 kg (2 persons)
F x G Platform size	2.44 x 0.91 m	2.44 x 0.91 m
A Length - stowed	10.4 m	10.4 m
H Length - storage	7.8 m	7.8 m
B Width	2.47 m	2.47 m
C Height - stowed	2.7 m	2.7 m
I Height - storage	3.3 m	3.3 m
Vertical jib rotation	133° (+68/-65)	133° (+68/-65)
Platform rotation	180° (+90/-90)	180° (+90/-90)
Boom rotation angle	90° (+75/-15)	90° (+75/-15)
Turntable rotation	360° continuous	360 ° continuous
Tailswing	109 cm	109 cm
D Wheelbase	2.5 m	2.5 m
E Ground clearance	34 cm	34 cm
Tilt	5°	5°
Drive speed	0.5 - 6.5 km/h	0.5 - 6.5 km/h
Gradeability	40 %	40 %
Turning radius - outside	6,3 m	3,4 m
Tires - foam-filled	385/65 - 22.5	385/65 - 22.5
Engine	Kubota 36.5 kW - 48.9 hp	Kubota 36.5 kW - 48.9 hp
Weight	13 320 kg	13 400 kg

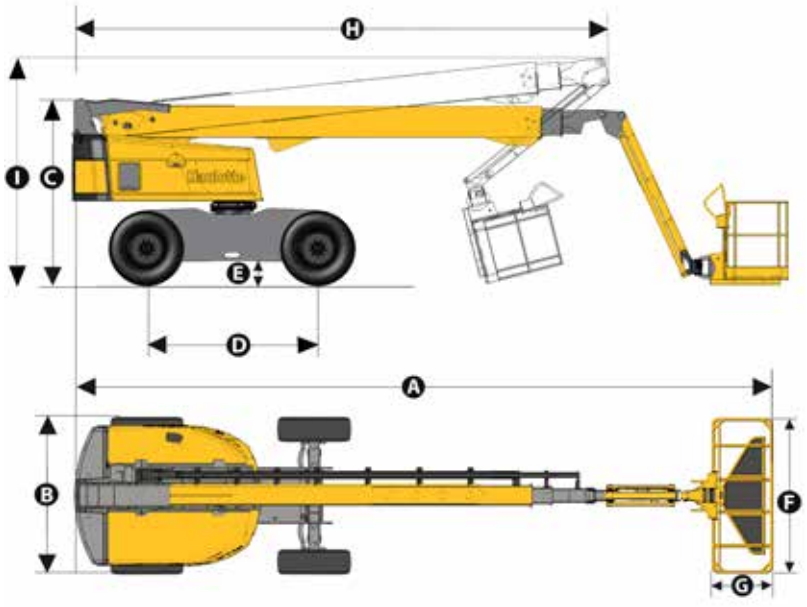

STANDARD EQUIPMENT

- 4 wheel drive / 2 (O) or 4 (PRO) wheel steer
- Automatic differential wheel lock increase rough terrain capacity
- Front oscillating axle increases stability on uneven ground
- Proportional controls enhance comfort and safety
- 4 simultaneous movements for maximum productivity
- 230 kg load capacity unrestricted working envelope
- Large modular basket 2.44 x 0.91 m, Drop entry gate
- Upper control box protection cover and tool tray in plastic ultra-solid
- Prepared for power to platform 110 / 230 V
- Diagnostic display for fault and service alerts
- Swing out engine tray for ease of maintenance
- Hour meter
- Low fuel level indicator (upper control box)
- Engine pre-heater with light indicator
- Sound and light alarm for tilt and load
- Maximum wind speed 45 km/h
- 12 V battery
- Electric pump system and emergency descent
- Boom maintenance (extension system, upper pads replacement) without boom disassembly
- Travel alarm
- Haulotte Activ'Shield™ Bar PRO model (for Europe and Latin America)

OPTIONS AND ACCESSORIES

- Dual load capacity 230 / 450 kg (2 / 3 persons)
- 3.5 kW hydraulic generator
- Narrow modular platform: 1.83 m x 0.8 m
- Lateral swing door entry gate
- Power to platform (Female plug in the basket with or without circuit-breaker 30mA)
- Air line to platform 13 mm inner diameter
- Rotating beacon
- Alarm package (motion alarm and travel alarm)
- Work lights
- Biodegradable hydraulic oil
- Cold weather package
- Warm environment package
- 60 km/h wind speed
- Haulotte Activ'Shield™ Bar (outside Europe and Latin America)

4000029990 - We reserve the right to modify the tecnical characteristics of this document without notice - 05/2015

Haulotte Group - La Péronnière - BP 9 - 42152 l'Horme - France • Tel: +33 (0)4 77 29 24 24 - Fax: +33 (0)4 77 29 43 95 - haulotte@haulotte.com - www.haulotte.com