HA16 RTJ PRO

OUT

PERFORMANCE & EASE OF USE

> Industry leading working envelope with an outreach of 8.3 m
> Best lifting speed of 40 sec
> Fully proportional and simultaneous movements
> 4-wheel steer and 360° continuous rotation for a greater productivity

BEST COMFORT AND SAFETY FEELING

> Haulotte Activ' Shield Bar 2.0
> Haulotte Activ'Lighting System for safe loading/unloading in conditions of low visibility

AVAILABLE Q4 2018

MAXIMIZED TOTAL COST OF OWNERSHIP

> Haulotte Activ'Screen (on board diagnostic)
> Haulotte Stop Emission System : automatically turns the engine off & on

AVAILABLE Q4 2018

> Easy access to all components

HA16 RTJ PRO

ROUGH TERRAIN
ARTICULATING BOOMS

TECHNICAL DATA

	HA16 RTJ PRO
Working height	16 m
Platform height	14 m
Horizontal outreach	8.3 m
Up and over clearance	7.65 m
Lift capacity	230 kg (2 persons)
F x G Platform size	1.83 x 0.80 m
A Length - stowed	6.75 m
H Transport length	5.05 m
B Width	2.3 m
C Height - stowed	2.3 m
I Transport height	2.4 m
Vertical jib rotation	140° (-80°/+60°)
Platform rotation	165° (-75°/+90°)
Turntable rotation	360° continuous
Tailswing	10 cm
D Wheelbase	2.1 m
E Ground clearance	38 cm
Tilt	5 °
Drive speed	5.2 km/h
Gradeability	40 %
Turning radius - outside	3.75 m
Tyres - solid rough terrain	850x340 mm
Power source	Kubota, 26.5kW (36hp), Stage 3A
Weight	6 650 kg

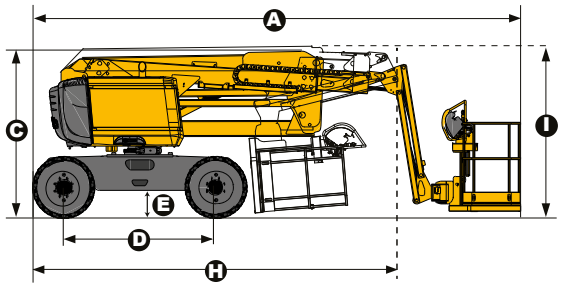

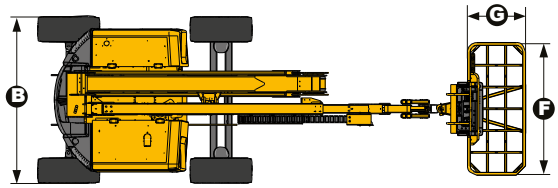

STANDARD EQUIPMENT

> Haulotte Activ' Shield Bar 2.0
> Haulotte Stop Emission System*
> Haulotte Activ'Lighting System*
> Embedded diagnostic system Haulotte Activ'Screen on lower control box, with color screen.
> Universal telematics plug
> 4 wheel drive
> 4 wheel steer
> Front oscillating axle increases stability on uneven ground
> 4 simultaneous movements for maximum productivity
> Permanent limited slip differential
> Upper control box cover
> Tool tray
> 230 kg (2 persons) load capacity
> Modular standard basket 1.83 m x 0.80 m, quick & easy to repair
> Drop bar entry gate
> AC power to platform (110/230V)
> Swing out engine tray for ease of maintenance
> Sound and light alarm for tilt and load
> Safe to use in winds up to 60km/h - 37mph
> Rotating beacon
> Travel alarm
> Hour meter
> 12 V battery / electrical control system
> Engine pre-heater with light indicator
> Low fuel level indicator (upper & lower control boxes)
> Electric pump system and emergency descent

OPTIONS AND ACCESSORIES

> Large cured on solid Rough terrain tires 1025x365
> Non-marking tyres 14x17.5
> Modular large basket 2.44 m x 0.91 m quick and easy to repair
> Power to platform (Female plug in the basket with or without circuit-breaker 30mA)
> Air-line to platform 6.5 mm inner diameter
> Lateral swing door entry gate
> Hydraulic generator Dynaset 3.5Kw
> Biodegradable hydraulic oil
> Hot weather kit : hydraulic oil cooler + hydraulic oil
> Cold weather kit : -10°C /-25°C
> Spark arrestor and electric one-way valve
> Working light
> Battery cut-off

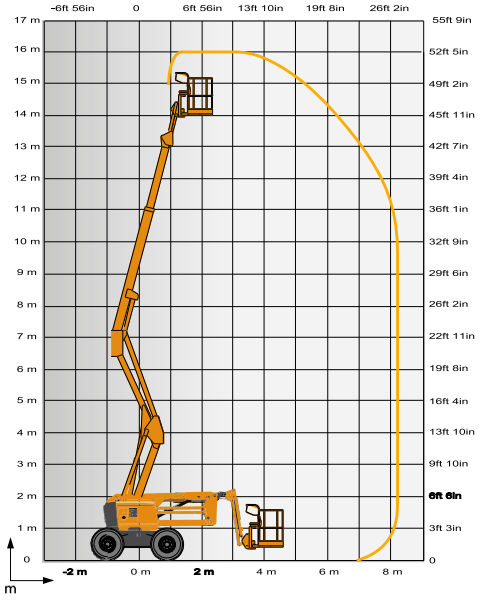

*Available Q4 2018

4000274230 - We reserve the right to modify the technical characteristics of this document without notice - 04/2018

La Péronnière - BP 9 - 42152 l'Horme - France - Tel: +33 (0)4 77 29 24 24 - Fax: +33 (0)4 77 29 43 95 - haulotte@haulotte.com - **www.haulotte.com**

Haulotte
LET'S DARE TOGETHER